


P8 outdoor SMD display Technical Specification:

Product model number	P8 Outdoor SMD 3535 256*128
1.Pixel	
LED type	SMD 3535 3 Chip in 1
Pixel configuration	1R, 1G, 1B
Wave length (nm)	R: 622.5-625, G: 522.5-525, B: 465-467.5
Pixel Pitch (mm)	6
2.Module	
Module size (mm)	256(L) * 128(H) * 18(D)
Module resolution (pixels)	32(L) * 16(H)
3.Cabinet	
Module quantity in a cabinet	4(L) * 8(H)
Cabinet size (mm)	1024(L) * 1024(H) * 160(D)
Cabinet resolution (pixels)	128(L) * 128(H)
Cabinet material	Steel
Weight (kg/cabinet)	≈48
4.Packaging	
Packing Way	Three cabinets packed into one
Packing box material	Wooden case
Packing box size (mm)	1330 * 1130 * 620
5.Electricity parameter	
Density(real) (pixels/m ²)	15625
Density(virtual) (pixels/m ²)	-----
White balance brightness(cd/m ²)	≥6500
Color temperature(K)	5000—9300
Brightness adjusted	100 grades by software, or by Auto-optic induced.
Viewing angle	140°
Best viewing distance(m)	6~200
Communication distance (m)	Internet Wire: 100, Multimode Fiber Cable: 500
Driving mode	Constant current, 1/4 duty
Gray grades	16384 levels for each color
Display color	4,398,046,511,104
Refresh frequency (Hz)	≥2400
Frame frequency (Hz)	≥60
Picture display method	Dot to dot display synchronized with CRT

Signal interface	DVI
Input signal	Video: PAL/NTSC optioned. VGA, S-video, DVD,TV
Display format	800 * 600, 1024 * 768, 1280 * 1024
Software	Support windows series system
Protection grade	IP65(front); IP54(rear)
Working temperature(°C)	-20~+60
Humidity(RH)	10%~90%
Stored temperature (°C)	-30~+70
Screen lifetime(hours)	≥100,000
Out of controlled pixels	≤1/10,000 (Out of controlled pixels means the pixels of which the brightness and the wave length are both >10% depart to the normal one)
Whole display flatness	Less than 1mm Junctionure
Maintenance way	Back-maintained, modules displaced
Switching power supply	110V/60HZ, 220V/50HZ (single phase)
Power consumption (w/m ²)	Max 900, Average: ≈300


◆ Relevant pictures:

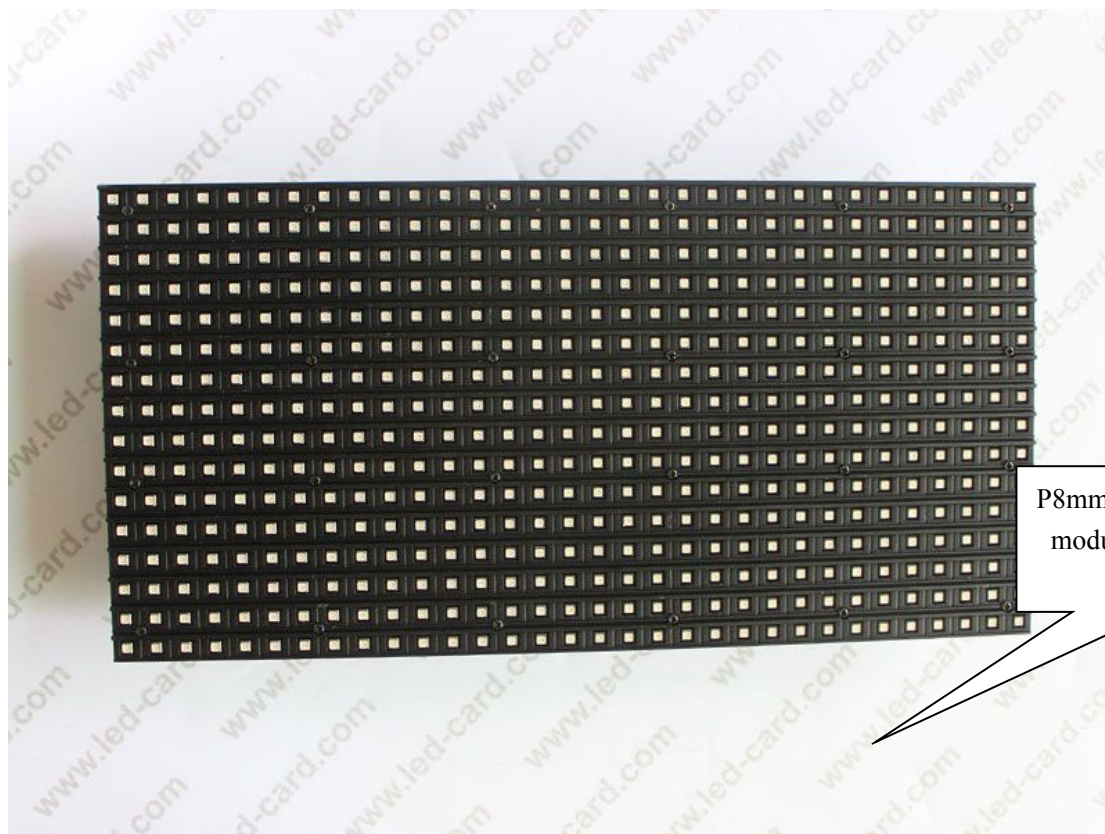


P8mm Outdoor SMD
module 256*128mm



P8mm SMD LED
module, 1/4 duty

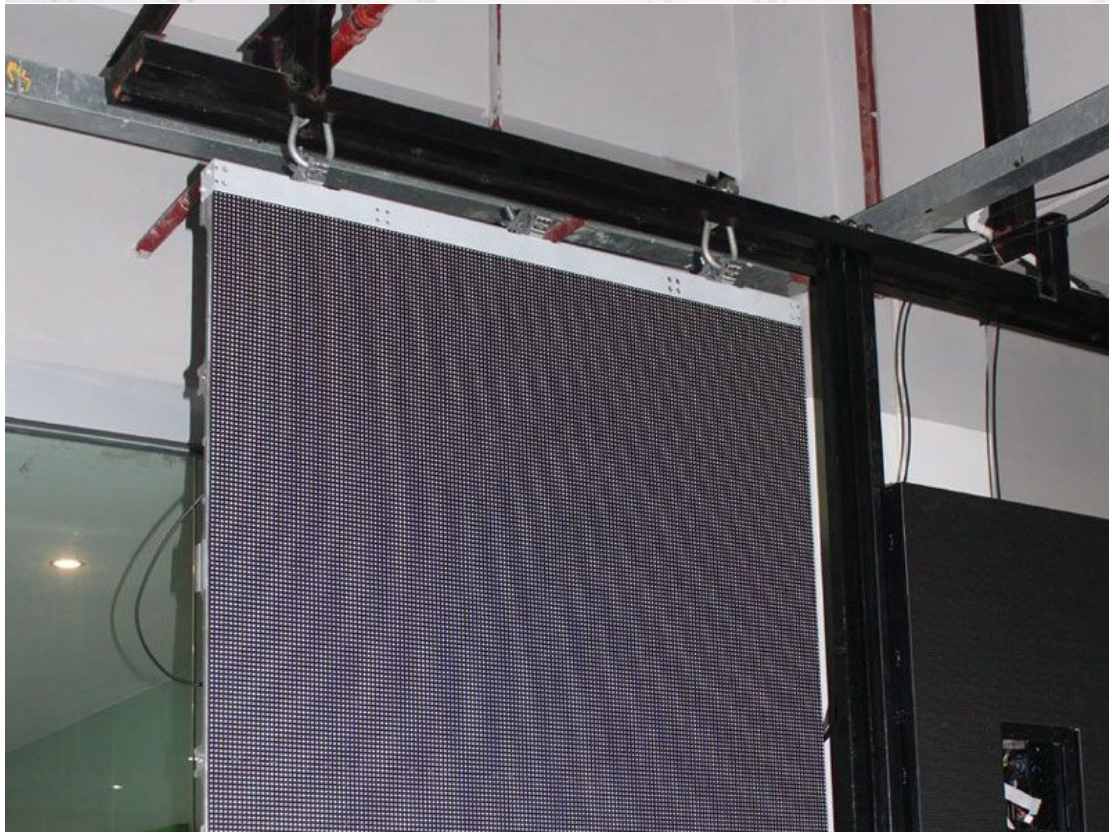



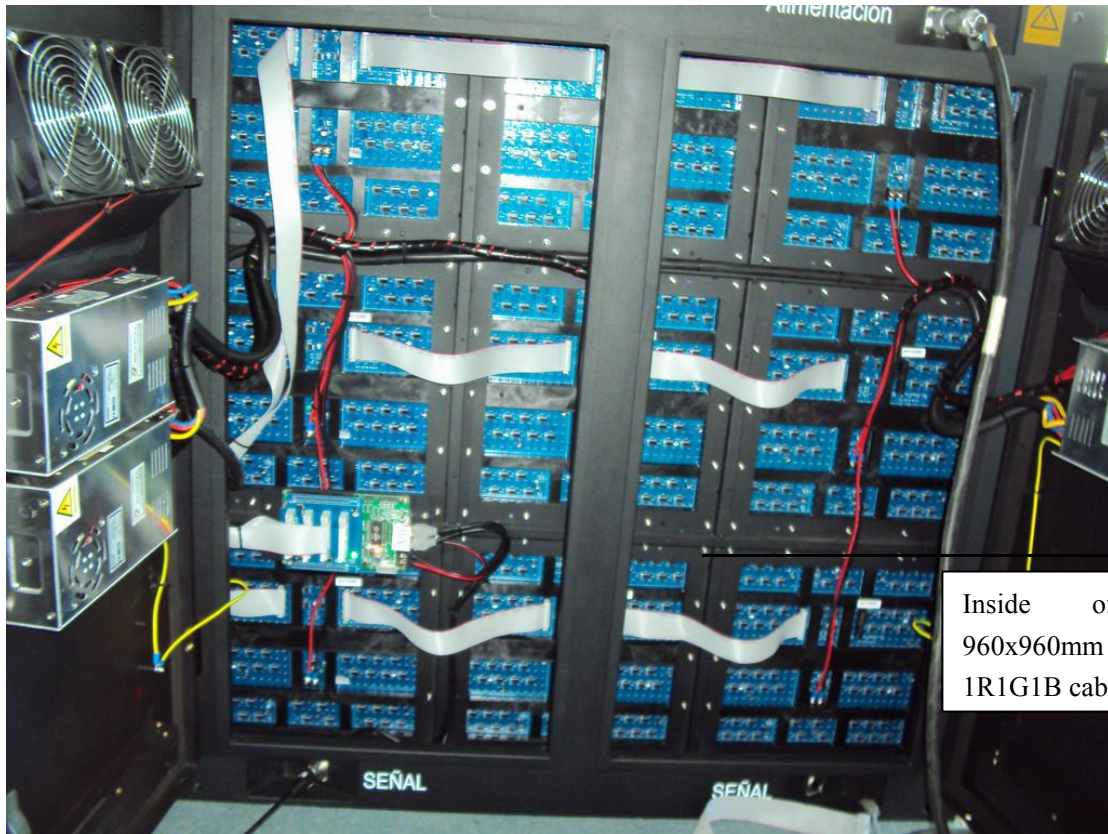

Inside of the
960x960mm P10
1R1G1B cabinet



Back view of
P16mm 1R1G1B
outdoor LED
screen




Case project of P16mm
1R1G1B LED screen,
147sqm



P16 1R1G1B outdoor
LED screen project
Guangzhou China,
80sqm



310sqm P10 1R1G1B
outdoor LED screen
in Xi'an China

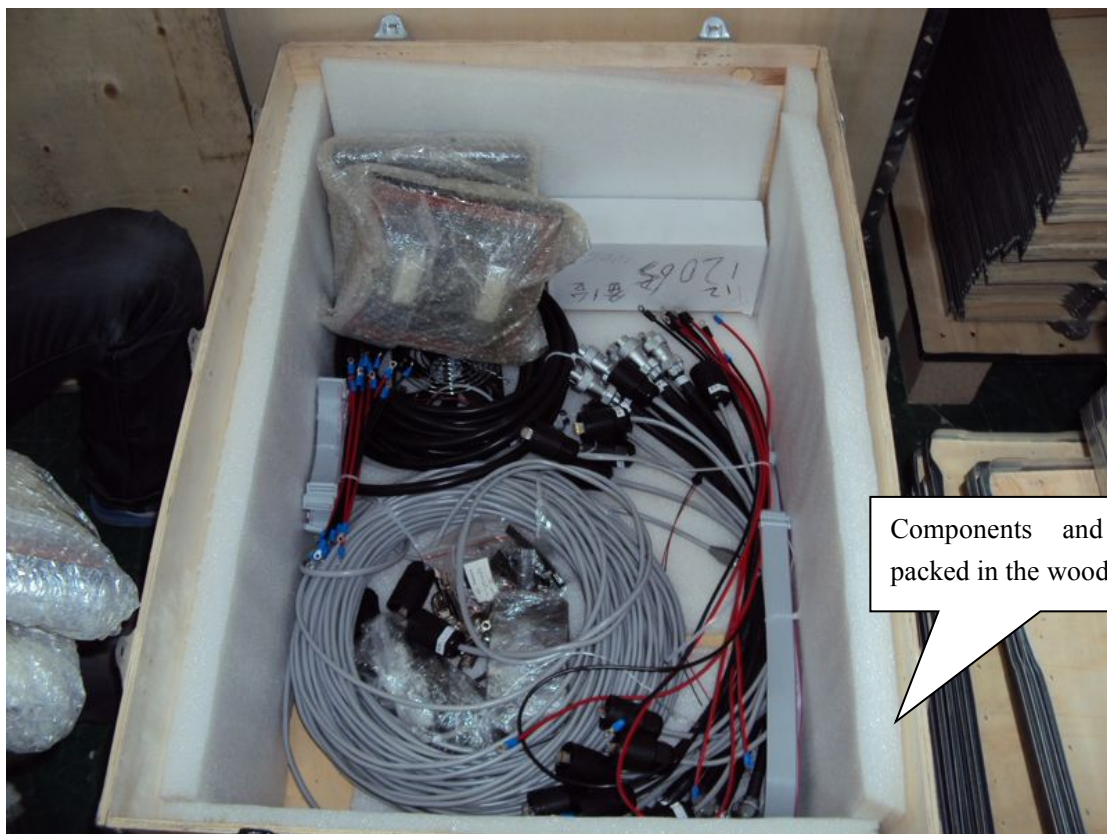

Components and accessories
packed in the wooden case



Wooden cases for packaging