





VSP 268S

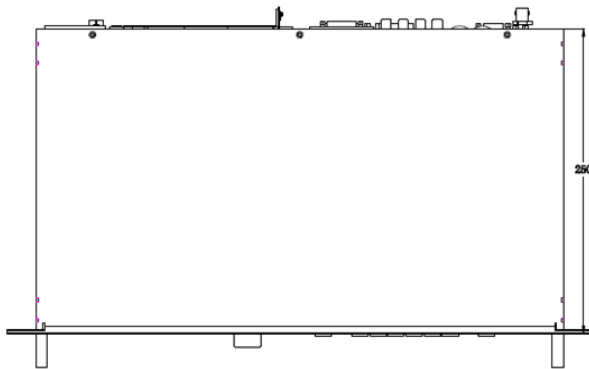

Dimensions

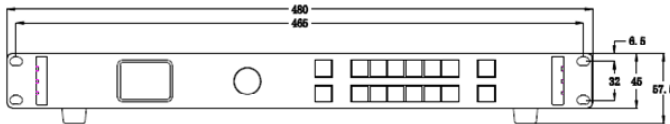

Order Codes

Product Code	Item
110-2000-03-1-14	VSP 268S


Key Features

- User define resolution
- EDID Management
- Cascade splicing
- Seamless switching with Fade
- Picture in Picture
- Two LED Sender installed
- Audio Video Sync
- Test Pattern Generator
- Wide range Optional input modules

Specification

Connectors	Inputs	Standard:	1 × HDMI 1 × VGA 1 × CVBS
		Optional:	1 × pair analog audio L/R 1 × 3G-SDI 1 × DVI
	Outputs	Standard:	2 × DVI 1 × VGA (from DVI 2 output by adaptor) 1 × HDMI LOOP 1 × pair analog audio L/R
Communication Ports	RS232		RJ11/RS232
	USB		2.0
Performance	Input Resolution	HDMI:	SMPTE: 625 PAL 525 NTSC 720p 1080i 1080p VESA: 800x600 1024x768 1280x768 1280x1024 1600x1200 1920x1080
		VGA:	800x600 1024x768 1280x1024 1440x900 1600x1200
Performance	Output Resolution	SDI:	625 PAL 525 NTSC 720p 1080i 1080p
		Refresh Rates:	23.98/24/25/29.97/30/50/59.94/60Hz
		Select from standard set or select user configurable	
Performance	Output Resolution	SMPTE:	720p 1080p
		VESA:	1024x768 1280x720 1280x800 1280x1024 1360x768 1366x768 1400x1050 1600x1200 1680x1050 1920x1080 1920x1200 2048x1152 2560x816 1440x900
		Refresh Rates:	50/60/75/85Hz
Performance	Standard Supported	SDI:	SMPTE 425M (Level A) SMPTE 424M SMPTE 292M
		VGA:	SMPTE 259M-C DVB-ASI
		DVI:	VGA-IJXGA
Features	Grayscale Processing	HDMI:	1.0 1.3
		Effects	Cut, Fade, Range of transitions
		Frame Delay	2 frames
Features	EDID Management	Sending card	Standard
		EDID Management	Standard
		Built in two send cards to install slots(support the installation of a large calorie)	
Power	Input Voltage	Max Power	65W
		AC 100~240V, 50/60Hz	
Environment	Temperature	Humidity	0°C~40°C
		10%~85%	
Physical	Weight		3.1kg (Net Weight)
		Dimensions	480mm x 250mm x 45mm (Device Dimension)

Application

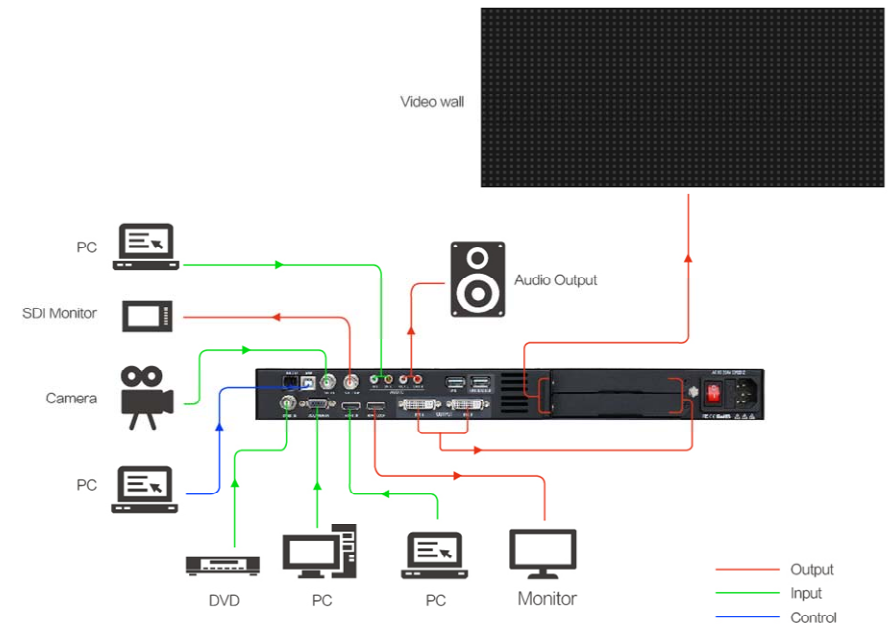

RGBlink

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C

Specifications are correct at time of printing and subject to change or alteration without notice.