


VSP 268



Dimensions

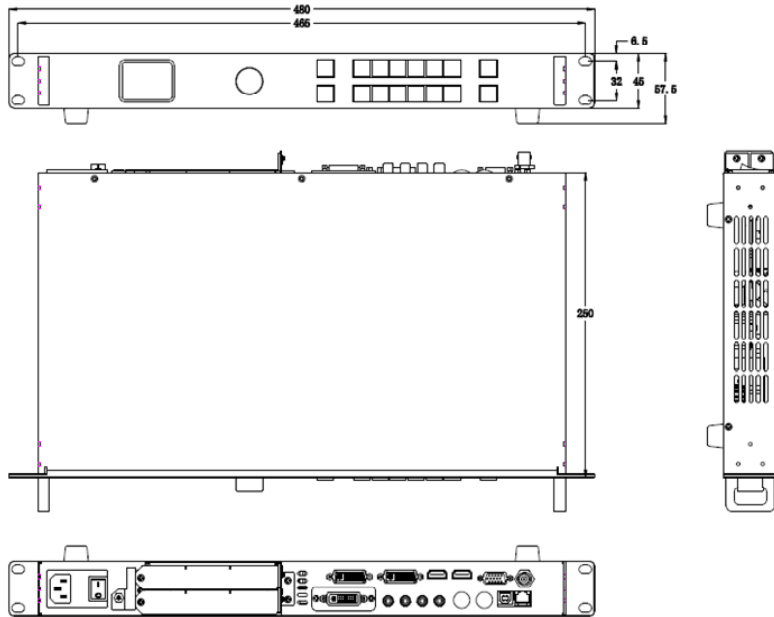

Order Codes

Product Code	Item
110-2000-03-0-14	VSP 268


Key Features

- User define resolution
- EDID Management
- Cascade splicing
- Seamless switching with Fade
- Picture in Picture
- Two LED Sender installed
- Audio Video Sync
- Test Pattern Generator
- Wide range Optional input modules

Specification

Connectors	Inputs	Standard:	1 × HDMI 1 × VGA 1 × CVBS 1 × pair analog audio L/R
		Optional:	1 × DVI 2 × DVI
	Outputs	Standard:	1 × VGA (from DVI 2 output by adaptor) 1 × HDMI LOOP 1 × pair analog audio L/R
Performance	Communication Ports	RS232	2.0
		USB	2.0
	Input Resolution	HDMI:	SMPTE: 625 PAL 525 NTSC 720p 1080i 1080p VESA: 800x600 1024x768 1280x768 1280x1024 1600x1200 1920x1080
		VGA:	800x600 1024x768 1280x1024 1440x900 1600x1200
	Output Resolution	SDI:	625 PAL 525 NTSC 720p 1080i 1080p
		Refresh Rates:	23.98/24/25/29.97/30/50/59.94/60Hz Select from standard set or select user configurable
Standard Supported	SMPTE:	720p 1080p	
		1024x768 1280x720 1280x800 1280x1024 1360x768	
	VESA:	1366x768 1400x1050 1600x1200 1680x1050 1920x1080	
		1920x1200 2048x1152 2560x816 1440x900	
Features	Refresh Rates:	50/60/75/85Hz	
		*Not all resolutions supported on VGA	
	SDI:	SMPTE 425M (Level A) SMPTE 424M SMPTE 292M	
		SMPTE 259M-C DVB-ASI	
Power	VGA:	VGA-UXGA	
		1.0	
	DVI:	1.0	
		HDMI:	1.3
Environment	Grayscale Processing	10 bit	
		Effects	Cut, Fade, Range of transitions
	Frame Delay	2 frames	
		EDID Management	Standard
Physical	Sending card	Built in two send cards to install slots(support the installation of a large calorie)	
		Input Voltage	AC 100~240V, 50/60Hz
	Max Power	65W	
		Temperature	0°C~40°C
Weight	Humidity	10%~85%	
		Weight	3.1kg (Net Weight)
	Dimensions	480mm x 250mm x 45mm (Device Dimension)	

Application

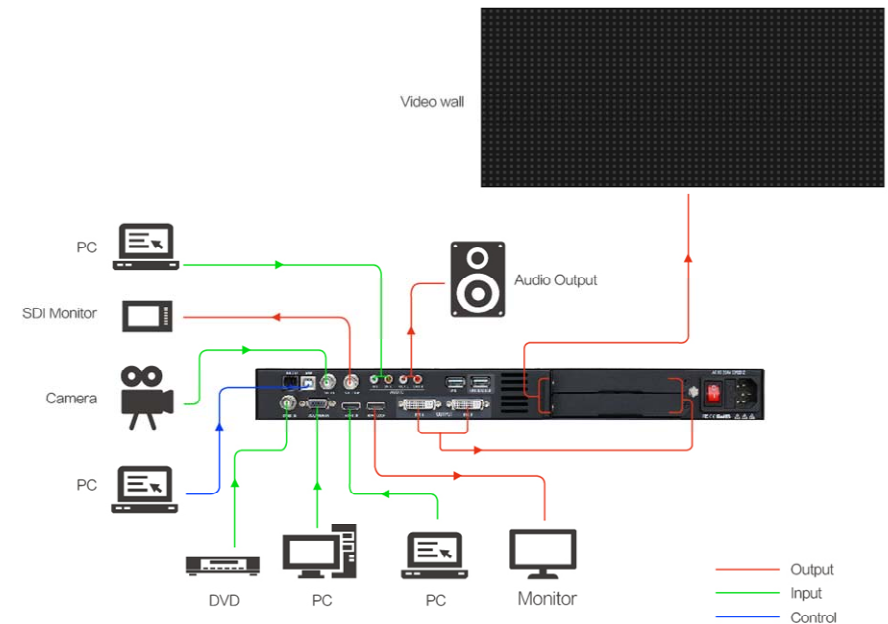

RGBlink

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C
 Specifications are correct at time of printing and subject to change
 or alteration without notice.