

## VDWALL LVP605S LED Video Processor



- ◆ A new generation of professional LED video processor
- ◆ Clearer and more fluent image, stronger functions, easier to operate and setup.
- ◆ **HD Text, Flash, Graphics & Logo Overlay**
- ◆ **Seamless Switching, Fade-in / Fade-out in different signal input signals.**
- ◆ 4 custom PIP/POP display modes, which can be switched by pressing one button
- ◆ 2048 x1152 full high-definition input and output for single machine
- ◆ multi-unit installed in parallel drive indefinite LED lattice
- ◆ AIAO(Any In Any Out) function allows for displaying any capturing picture in specific area on the screen

### Features

1. 10+ Bit Faroudja® DCDI Cinema Processing
2. New Faroudja® Real Color®

3. Faroudja® TureLife™ Video Enhancer
4. Advanced 4x4 Pixels Interpolation Scaling Algorithm
5. Advanced 4-symbol LUT for H and V Shrink & Zoom Scaler
6. Independent H & V Scaling Ratios
7. HDMI 1.3a with HDCP, HD 1080p input
8. SDI. HDSDI(1080p) Input
9. 10-bit Processing
10. Seamless Switching, Fade-in / Fade-out
11. HD Text, Flash, Graphics & Logo Overlay
12. 4 custom PIP/POP display modes, which can be switched by pressing one button
13. Hot Spare function, display will be stable and reliable
14. Picture Freeze function
15. AIAO(Any In Any Out) function allows for displaying any capturing picture in specific area on the screen
16. 2048x1152 output for single machine
17. Multi-machine in parallel, multi-unit installed in parallel drive indefinite LED lattice
18. Easy setup and adjustment through knob and keys on the panel. Full design RS232 command for operating and setting.
19. Press keys or knob on frontal panel to directly select 10-channel input signal source, including:
  - 3xCVBS      1xDVI      1xHDMI      2xVGA
  - 1xYPbPr/ YCbCr      1xS-VIDEO
  - 1xSDI
20. 2 channels can be configured to connect external stereo audio, plus DVI, HDMI and SDI audio, there are 5-channel audio for synchronous switch
21. 2 LED Transmission Cards Built-in ability (sending cards are optional)
22. 24/7 Application


## ◆ Specifications

Inputs	
Nums/Type	3xComposite 1xS-Video 1xYPbPr 2xVGA (RGBHV) 1xHDMI (1.3a with HDCP ) 1xDVI (HDMI) 1xSDI
Video system	PAL/NTSC
Composite Video Scope/Impedance	1V (p_p) / 75Ω
S-VIDEO Scope/Impedance	Y: 1.0V (p_p) / 75Ω, C: 0.35V (p_p) / 75Ω


VGA Format	PC (VESA)	≤2048x1152 @60Hz
VGA Scope/Impedance	R、G、B = 0.7 V (p_p) / 75Ω	
DVI Format	SD/HD (CEA-861)	≤1920x1080P @60Hz
	PC (VESA)	≤2048x1152 @60Hz
HDMI 1.3 Format (HDCP)	SD/HD (CEA-861)	≤1920x1080P @60Hz
	PC (VESA)	≤2048x1152 @60Hz
YPbPr Format	SD/HD (CEA-861)	≤1920x1080P @60Hz
YPbPr Scope/Impedance	Y= 1.0V (p_p) / 75Ω Pb= 0.35V (p_p) / 75Ω Pr= 0.35V (p_p) / 75Ω	
SDI format	SDI-SMPTE 259M-C	576i @50Hz 480i @60Hz
HDSDI 3GSDI format	HDSDI-SMPTE 292M SMPTE 274M/296M	1080P @50Hz/60Hz 1080i @50Hz/60Hz 720P @60Hz
AUDIO Scope/Impedance	2.0Vp-p/10KΩ	
Input Connectors	VGA: 15pin D_Sub(Female) DVI: 24+1 DVI_D YPbPr: BNCx3 Composite: BNC S-VIDEO: 4pin mini DIN(Female) SDI/ HDSDI : BNC	
<b>Outputs</b>		
Nums/Type	1xVGA (RGBHV) 2xDVI	
VGA/DVI Format	1024x768@60Hz/75Hz 1280x1024@60Hz/75Hz 1600x1200@60Hz 1920x1080p@50Hz/60Hz 1366x768@60Hz 1440x900@60Hz 2048x1152@60Hz	
VGA Scope/Impedance	R、G、B = 0.7 V (p_p) / 75Ω	
Output Connectors	VGA OUT: 15pin D_Sub(Female) DVI OUT1: 24+5 DVI_I DVI OUT2: 24+1 DVI_D	
<b>Others</b>		
Control	Panel Button,RS232	
Power	100-240VAC 35W 50/60Hz	
Operating Temp	5-40 °C	
Humidity	15-85%	
Dimensions (Package)	166 mm (height) ×428mm (width) ×545mm	

	(length)
Weight (G.W.)	5.0 Kg
Weight (N.W.)	3.2Kg

## ◆ Dimensions

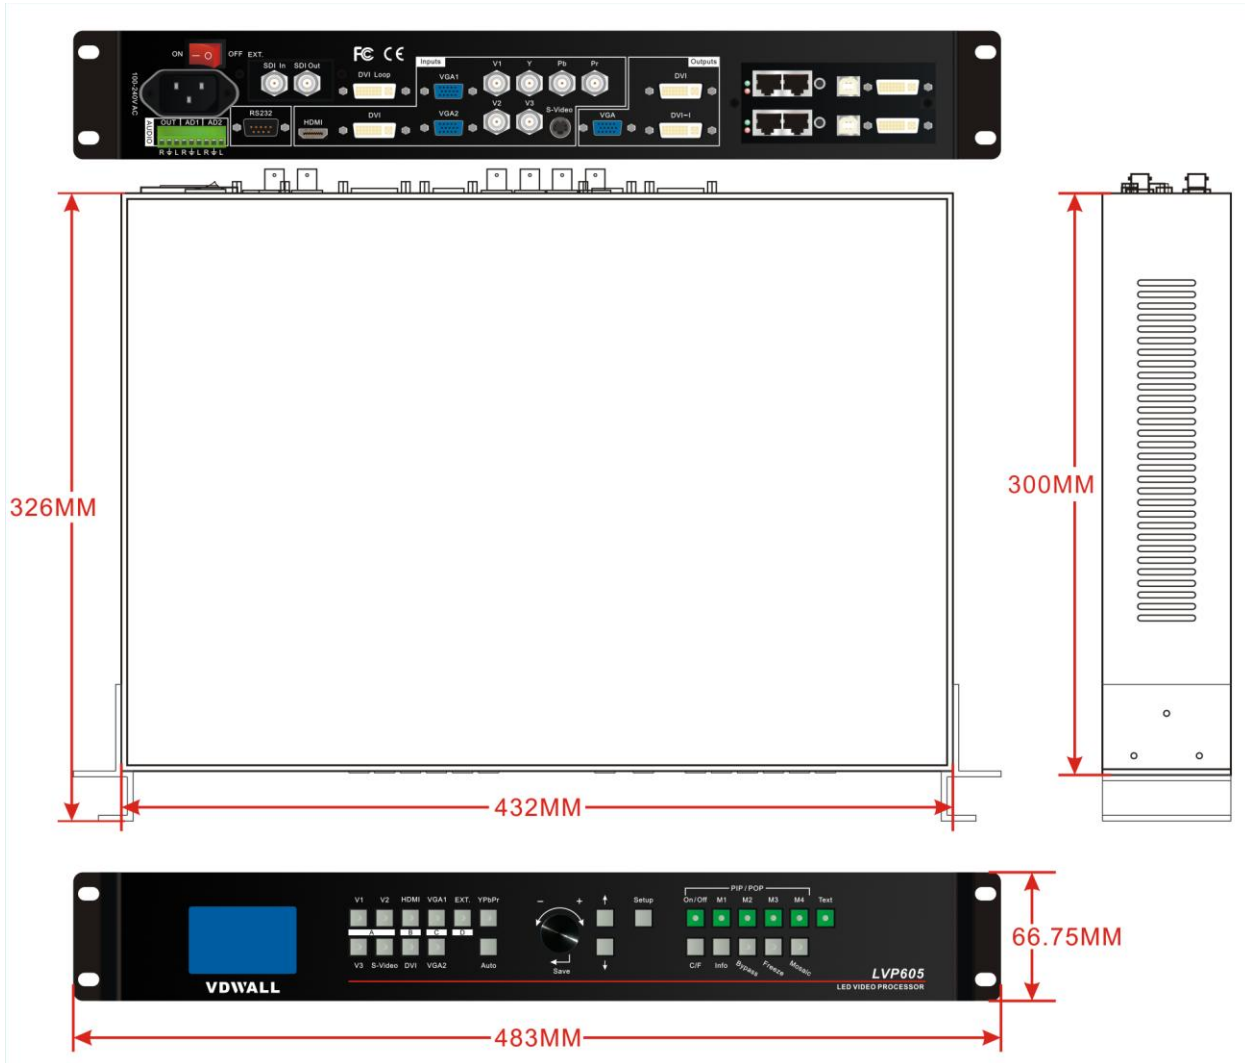

## ◆ Connection diagram

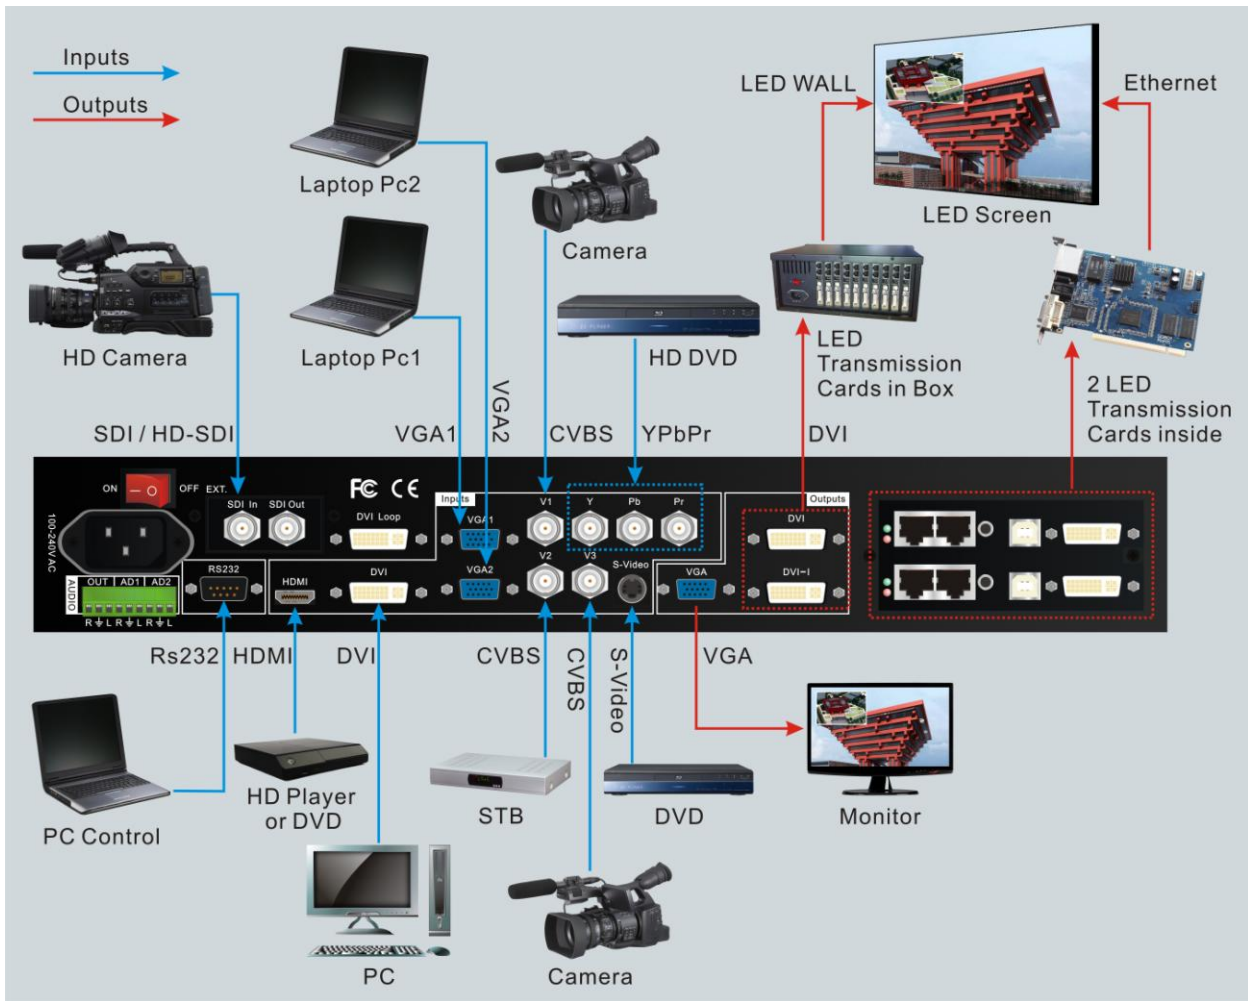





You can Get the [LVP605S LED Video Processor](#) here